


## FICHES TECHNIQUES PRODUITS

NOM/NAME	TITAPAK
TYPE/TYPE	V-GD
DIMENSIONS EFFECTIVES/EFFECTIVE - mm	592x592x292
SURFACE MEDIA FILTRANT / MEDIA AREA - m <sup>2</sup>	18,5
CLASSE EN 1822 / EN 1822 CLASS	E10

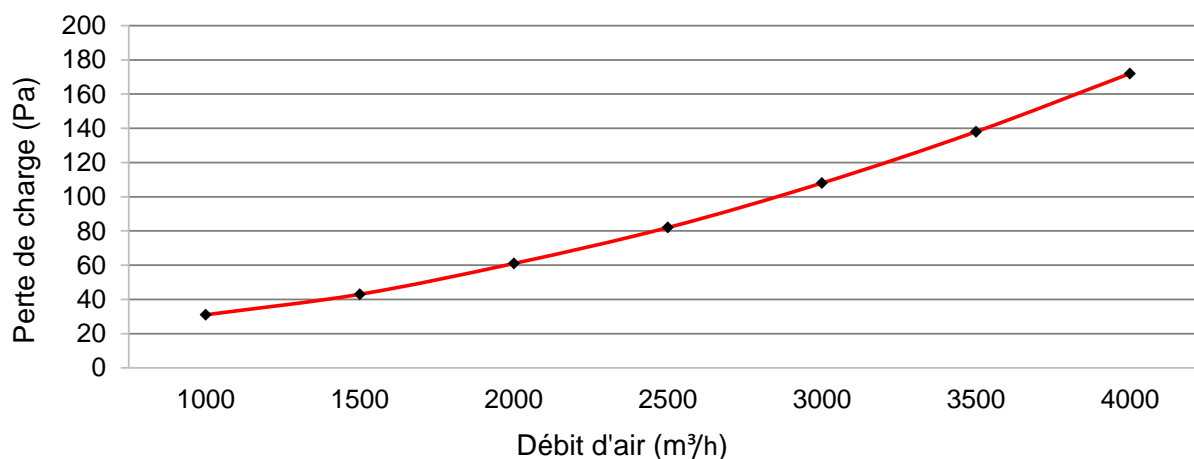

PERTE DE CHARGE FINALE/FINAL PRESSURE DROP Pa	450
PERTE DE CHARGE FINALE/FINAL PRESSURE DROP Pa EN 13 053	250
<b>TEMPERATURES LIMITES/TEMPERATURE LIMITS °C</b>	
. CONTINUE/CONTINUOUS	60
. ACCIDENTELLE/EVENT	65
. DUREE ACCIDENTELLE/LIFE TIME OF EVENT	1 HEURE
. CLASSEMENT AU FEU/FIRE TEST	M1
<b>NATURE DES COMPOSANTS/MATERIAL COMPONENTS :</b>	
. PAROIS CELLULE/CELL SIDES	POLYSTYRENE
. MEDIA PACK	FIBRE DE VERRE
. LUT/BOND	OUI
. SEPARATEUR/SEPARATOR	HOTMELT

160 rue Pierre Fallion 69140 Rillieux la Pape - France

Tel 33 (0) 4 72 27 07 06 - Fax 33 (0) 4 72 27 18 40 - info@titanair.fr

SAS au capital de 50 000 € - RCS 422 374 926 Lyon - SIRET 422 374 926 0034 - Code APE 2825Z - N° TVA : FR16422374926